

STEALTH Metal Detector



OVERVIEW:

Stealth metal detectors are custom manufactured to suit any application. The Stealth uses digital signal processing technology and has high sensitivity levels to ensure the detection of the smallest ferrous, non-ferrous and stainless steel contaminants. The built-in data collection software with USB data transfer establishes the Stealth as an effective critical control point complying with stringent HACCP regulations.

THE FORTRESS ADVANTAGE:

- Simple Operation
- Custom built detectors or stock sizes
- "Never Obsolete" Commitment: detectors are always upgradable
- Modular design; have fewer components
- Outstanding Reliability
- Exceptional Performance

KEY FEATURES:

- Contact Reporter Lite Software Included
- Detailed Data Collection
- Digital Signal Processing Technology
- Ultra Sensitive Detection
- AutoTest: Self Diagnostic Testing
- Automatic Calibration
- System Set-Up in Seconds
- Flash Memory Stability
- Multi-Level Password Protection

APPLICATIONS:

- Bakery
- Meats
- Dairy
- Prepared Meals
- Packaged Products
- Pharmaceutical
- Nutraceutical
- Confectionery
- Fresh Foods
- Frozen Foods
- Powders/Grains

AVAILABLE OPTIONS:

BSH Rugged Casing for Harsh Environments



Integrated Vector Conveyor Systems



Contact Communication Software



Fortress Technology Inc.
51 Grand Marshall Dr,
Toronto, ON, M1B 5N6
Canada
Tel: 1-888-220-8737
sales@fortresstechnology.com


Fortress Technology (Europe) Ltd.
The Phantom Building
7 Beaumont Road, Banbury,
OX16 1RH UK
Tel: +44 (0) 1295 256 266
info@fortresstechnology.co.uk

Fortress Technology Sistemas de Inspeção Ltda.
Rua Danilo Valbuza n° 585, Bairro
Laranjeiras, Caieiras São Paulo, CEP.
07700-000
Fone: 55-11-3641-6153
vendas@fortress-iis.com.br

FORTRESS
TECHNOLOGY

www.fortresstechnology.com

STEALTH Metal Detector

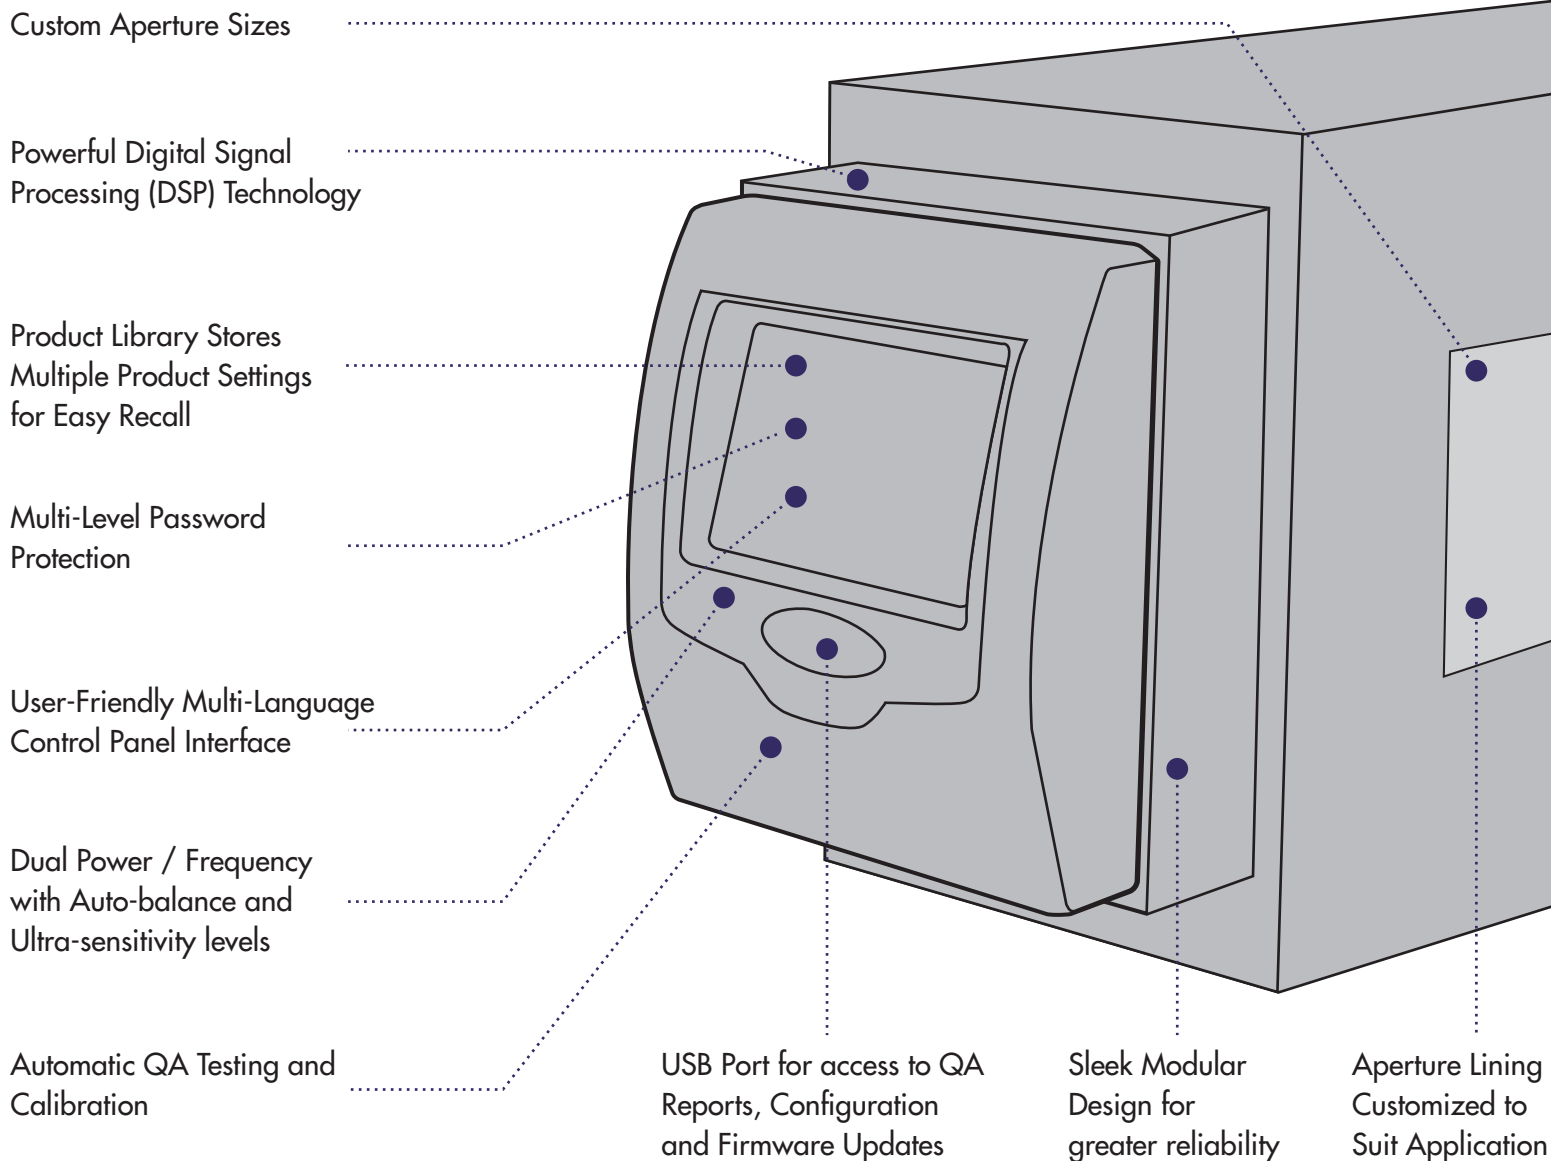

DETECTOR OPTIONS & SPECIFICATIONS:

| | |
|-------------------------|--|
| Construction | Aluminum epoxy painted or Stainless Steel |
| BSH Extra-Rugged Casing | Vibration immunity and stability in heavy duty applications and harsh environments |
| Aperture Lining | Epoxy resin for heavy wash down or dry liner for wipe down applications |
| Rating | Aluminum: Nema 4 / IP65K or Stainless Steel: Nema 4X / IP69K |
| Remote Mounting | Display panel terminal can be mounted remotely (Up to 4000ft / 1,200m) |
| Network Communications | RS485, Ethernet / Wireless via Contact Communications Software |
| Electrical | 90-250v Single phase, 1 amp, 50-60Hz |

Simple Operation. Outstanding Reliability. Exceptional Performance.

